eubiq
design private limited

Date: April 22, 2026

QUOTATION

To:	
HI-TECH MED GAS SOLUTIONS Puthen Purayil Arcade, Opp: Axis Bank, Hospital Junction Kundara, Kollam, Kerala - 691501 Ph: 9544372774 / 9567618146 Email: hitechmedgassolutions@gmail.com | ramaswamirajesh@gmail.com	**Quotation No:** **0426/IN/HTMGS/SIDDHARTH/MUMBAI** Date: 22 April 2026 Valid Until: 22 April 2026

Project: Siddharth Hospital, Mumbai
Product: Eubiq EBHP S - Surface Type Dual Compartment Bed Head Panel
Manufacturer: Eubiq Design Pvt. Ltd. (www.eubiq.in)

BILL OF QUANTITIES

S.No	Description	UOM	Qty	Unit Rate	Total Amount
1	**SITC of Double Duct Bed Head Horizontal Wall Panel - 1200mm** Eubiq EBHP S Surface Type Dual Compartment, made of Aluminium powder coated profiles with double duct. Separate duct for electrical sockets and separate duct for gas outlet points. Provision for 6 nos. electrical sockets (3 nos. 5A sockets + 3 nos. 15A sockets) in separate duct. Provision for 6 nos. gas outlet points (pre-piped). Gas outlet points cost NOT included. Provision for RJ45 connector and Nurse Call System bedside switch with partition between LV and ELV system.	Nos.	**50**	₹15,500	₹7,75,000

eubiq
design private limited

Date: April 22, 2026

2	**SITC of Double Duct Bed Head Horizontal Wall Panel - 600mm** Eubiq EBHP S Surface Type Dual Compartment, made of Aluminium powder coated profiles with double duct. Separate duct for electrical sockets and separate duct for gas outlet points. Provision for 4 nos. electrical sockets (2 nos. 5A sockets + 2 nos. 15A sockets) in separate duct. Provision for 2 nos. gas outlet points (pre-piped). Gas outlet points cost NOT included. Provision for RJ45 connector and Nurse Call System bedside switch with partition between LV and ELV system.	Nos.	**256**	₹9,000	₹23,04,000
				Subtotal	**₹30,79,000**
				Discount (15%)	**₹4,61,850**
				After Discount	**₹26,17,150**
				GST @ 18%	**₹4,71,087**
				GRAND TOTAL	**₹30,88,237**

Note: Gas outlet points are a separate line item and their cost is NOT included in the above rates.

SCOPE OF WORK

✓ Supply of Eubiq EBHP S Dual Compartment Bed Head Panels
✓ Mounting arrangements of all electrical sockets (5A and 15A) as per specification
✓ Mounting arrangements for medical gas outlet points within the panel
✓ Mounting arrangements of RJ45 data connector provision
✓ Mounting arrangements of Nurse Call System bedside switch
✓ LV and ELV partition within the panel
✓ End caps, front covers, screw covers, and all accessories
✓ Testing and commissioning of all electrical connections are not in our scope

B-1011, WTT Complex, Near - Sarkhej Sanand Over Bridge, SG Highway, Makarba Ahmedabad-380051, Gujarat
info@eubiq.com
info@61dxb.com
+91 76000 03900
+971 54 591 6161
+91 93777 13682

Olga

eubiq
design private limited

Date: April 22, 2026

PRODUCT SPECIFICATIONS - EUBIQ EBHP S DUAL COMPARTMENT

Parameter	Specification
Material	Extruded Aluminium
Grade	ALU 6063 T5
Surface Finishing	Powder Coating / PVDF (Treated to Prevent Corrosion)
Colour	Off-White (Standard); Customized Colours Available Upon Request
Resistance	Disinfection & Corrosion Resistant
Width	350mm
Depth	85mm
End Caps	SS Metal
Mounting	Surface Mounted
Configuration	Length and Configuration as per drawing approvals

B-1011, WTT Complex, Near - Sarkhej Sanand Over Bridge, SG Highway, Makarba Ahmedabad-380051, Gujarat

info@eubiq.com
info@61dxb.com

+91 76000 03900
+971 54 591 6161
+91 93777 13682

Olga

eubiq
design private limited

Date: April 22, 2026

DRG.NO.:GA001	Hospital Name:- Siddharth Hospital	DATE :20/04/2026

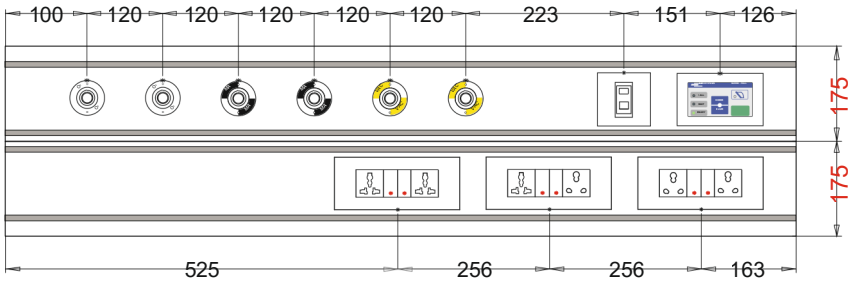

EUBIQ BHP HP5(A+A) SURFACE TYPE DUAL COMPARTMENT
LENTH-1200MM
QTY-50 NOS

eubiq
Tel: +91 9377713682

Modular Plate Make:	Drawing Approved By
Size: L- H-	Signature:-.....
Nurse Call Make:	Stamp:.....
Size: L- H-	Date:-.....
Ges Outlet Make:	NOTE:- All Dimensions Are In 'mm'

B-1011, WTT Complex, Near - Sarkhej Sanand Over Bridge, SG Highway, Makarba Ahmedabad-380051, Gujarat
info@eubiq.com
info@61dxb.com
+91 76000 03900
+971 54 591 6161
+91 93777 13682

eubiq
design private limited

Date: April 22, 2026

DRG.NO.:GA002	Hospital Name:- Siddharth Hospital	DATE :20/04/2026

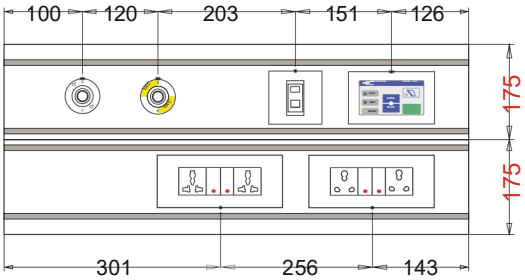

EUBIQ BHP HP5(A+A) SURFACE TYPE DUAL COMPARTMENT
LENTH-700MM
QTY-256 NOS

eubiq
Tel: +91 9377713682

Modular Plate Make:	Drawing Approved By
Size: L- H-	Signature:-.....
Nurse Call Make:	Stamp:.....
Size: L- H-	Date:-.....
Ges Outlet Make:	NOTE:- All Dimensions Are In 'mm'

B-1011, WTT Complex, Near - Sarkhej Sanand Over Bridge, SG Highway, Makarba Ahmedabad-380051, Gujarat
info@eubiq.com
info@61dxb.com
+91 76000 03900
+971 54 591 6161
+91 93777 13682

eubiq
design private limited

Date: April 22, 2026

TERMS & CONDITIONS

1. Prices are Inclusive of GST (18% applicable).
2. This quotation is valid till 25 April 2026.
3. Payment Terms: 50% advance along with Purchase Order, 40% against performa invoice before dispatch at site, 10% within 10 days of delivery.
4. Delivery Period: 8-10 weeks from the date of receipt of confirmed Purchase Order and advance payment.
5. Installation will be carried by client and we can provide by our trained technicians at site.
6. Gas outlet points (medical gas outlets) are NOT included in this quotation and shall be quoted separately.
7. Civil work, electrical mains supply up to the panel location, and medical gas piping up to the panel are in client scope.
8. Warranty: 1 year from the date of commissioning against manufacturing defects (excluding third-party components such as gas outlets, nurse call units, switches, and sockets).
9. 5 years warranty on powder coating finish (against peeling, fading, and corrosion under normal conditions)
10. Any changes in design/specification after order confirmation may attract additional charges.
11. Freight and transportation charges are excluded.
12. Switch Sockets will be provided by the client.

For Hi-Tech Med Gas Solutions	Accepted By (Client)
Authorized Signatory	Signature & Stamp

B-1011, WTT Complex, Near - Sarkhej Sanand Over Bridge, SG Highway, Makarba Ahmedabad-380051, Gujarat

info@eubiq.com
info@61dxb.com

+91 76000 03900
+971 54 591 6161
+91 93777 13682

Olga